


Temple	Polycarbonate
Lens	Polycarbonate, thickness: 2,4 mm
Weight	23 g

Reference	Frame Colour	Lens Colour	Features	Frame Marking	Lens Marking	Lens Norms
 60550	Clear	Clear	Anti-fog	FT	2-1,2 1FTN	EN 170
 60552	Clear	Clear	Anti-fog, hard coated, UV 400	FT-CAT.0	2-1,2 1FTKN	EN 12312, EN 170
 60558	Clear	Clear	Anti-fog	FH - CAT.0	2-1,2 1FHN	EN 12312, EN 170
 60551	Clear	I/O Mirror	UV 400 mirror	FT-CAT.1	5-1,7 1FT	EN 12312, EN 172
 60553	Smoke	Smoke	Anti-fog	FT	5-3,1 1FTN	EN 172
 60554	Smoke	Dark smoke	Anti-fog	FT-CAT.4	5-4,1 1FTN	EN 12312, EN 172
 60556	Yellow	Yellow	Anti-fog	FT	2-1,2 1FTN	EN 170
 60559	Dark smoke	Dark smoke	Anti-fog	FH-CAT.4	5-4,1 1FHN	EN 12312, EN 172

Packaging & Storing

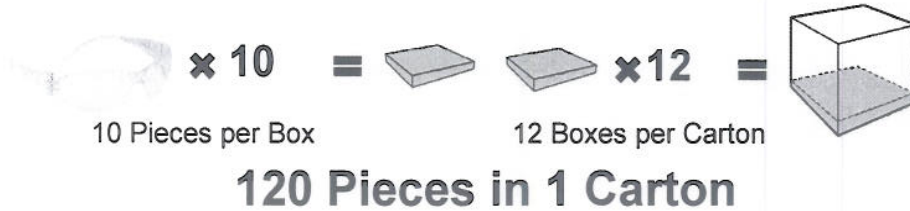

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

Product Standards


This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0776
Delivered by INSPEC (notified body n° 0194)**




This model is in conformity with the standard EN 166:2001

General Norms & Explanation

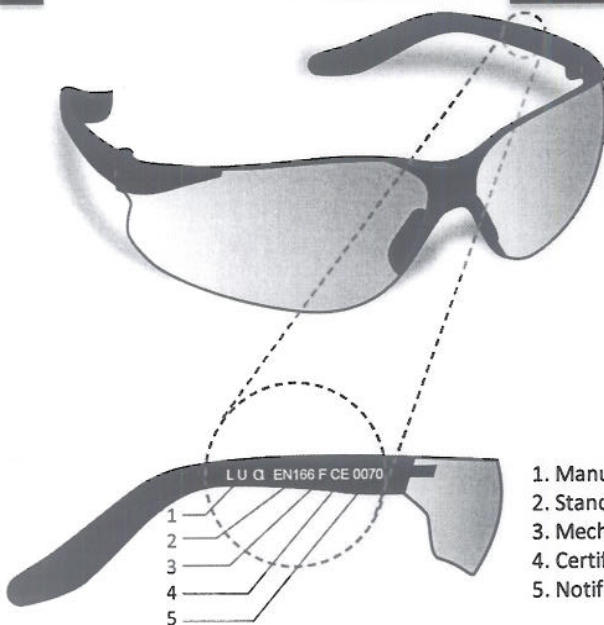

1. Manufacturer
2. Standard
3. Mechanical Resistance
4. Certification
5. Notified body

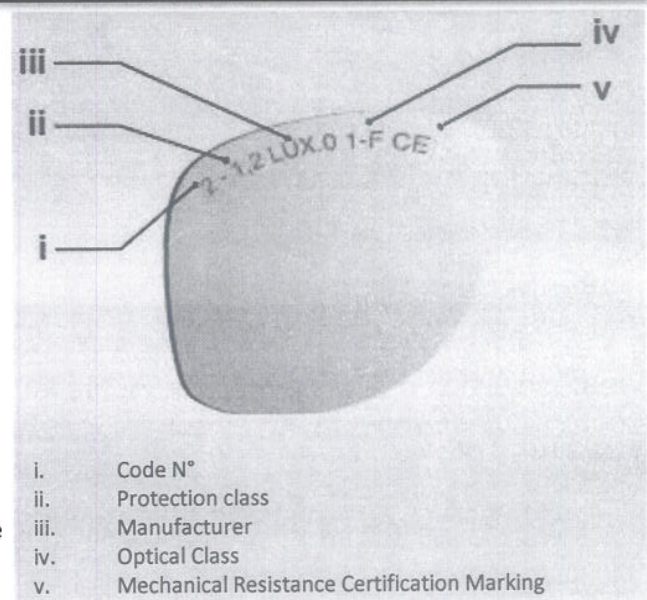

- i. Code N°
- ii. Protection class
- iii. Manufacturer
- iv. Optical Class
- v. Mechanical Resistance Certification Marking

EN 166	Specification (optical quality, resistance to usual and mechanical risks and to impacts)
EN 169	Welding Filters
EN 170	Ultraviolet filters
EN 172	Sunglare filters for industrial use
EN 175	Welding equipments
EN 379	Welding filters with variable shade or dual shade
EN 1731	Mesh faceshield
EN 12312-1	Sunglasses and related eyewear : Sunglasses for general use

Temperature between -5° (±2°) & 55° (±2°)	T
Hard coated lens	K
Anti-fog coated lens	N
Protection against liquids	3
Enhanced solidity	S
Protection against big dusts	4