




# ENERGY ABSORBING WEBBING LANYARD

Réf. 71410

## TECHNICAL SHEET

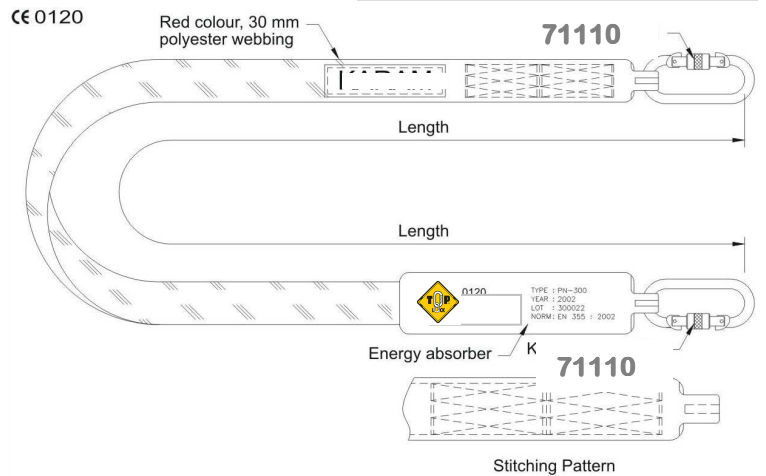

Gencode :

3435241 714107

## GENERAL DESCRIPTION AND MATERIALS

- red weaved polyester webbing ,width : 44 mm
- energy absorber
- Total length : 1.8m
- Static strength: > 15KN
- 2 stitched textile loops with black plastic protection
- Weight : 1800 g (+/-10%)
- Breaking strength minimum : 30KN
- Minimum 6m free space from anchorage point

## SPECIFIC ADVANTAGES

- 2 attachment elements
- delivered with 2 connectors 71110

## MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

## PACKAGING

- Individual packing
- Carton of 20 energy absorbers

## STANDARDIZATION

This energy absorber is in conformity with the model of individual safety equipment which correspond to

**EN 355:2002**

**The CE Type-examination certificate 4303 Issue 1 Extension 1**

Delivered by **SATRA (notified body n° 0321)**



**EUROPROTECTION** – 420, rue de la Dombes – 01700 MIRIBEL – FRANCE